



FLAVOR PAPER

sales@flavorpaper.com | flavorpaper.com

# CELESTIAL DRAGON

by Karen Hsu of Omnivore



This pattern can be printed in three ways to create totally different looks. The base pattern for Celestial Dragon is intricate and asian-inspired (see Scarlet and Super Green). In Torn Gold, the secondary screen creates the illusion of peeling paper. Torn Plaid Marshmallow shows the third option of an additional screen that makes it appear as if you've torn off wallpaper to discover this dragon from outer space pattern. The torn options really add a nice trompe l'oeil effect.

## SPECS

ROLL SIZE ————— 27" W x 180" L  
PATTERN REPEAT ————— 18.44" / 46.48cm  
SIDE TO SIDE MATCH ——— STRAIGHT ACROSS  
MADE TO ORDER IN IN USA

LEARN MORE!







FLAVOR PAPER

sales@flavorpaper.com | flavorpaper.com

# CELESTIAL DRAGON

by Karen Hsu of Omnivore



## SCARLET

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I MATTE GOLD MYLAR
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED




## SUPER GREEN

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I CLAY COATED EBONY
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED



## TORN GOLD

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I CLAY COATED OATMEAL
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED

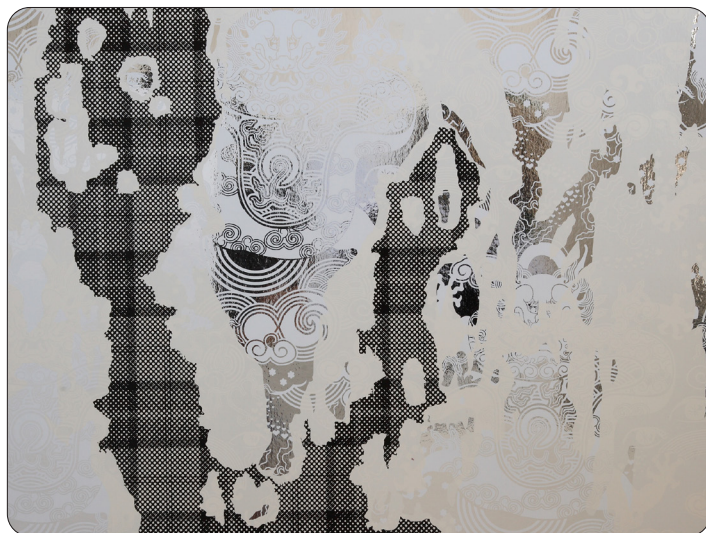

## TORN MARSHMALLOW

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I CHROME MYLAR
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED