


## CIRCUIT

by Ted

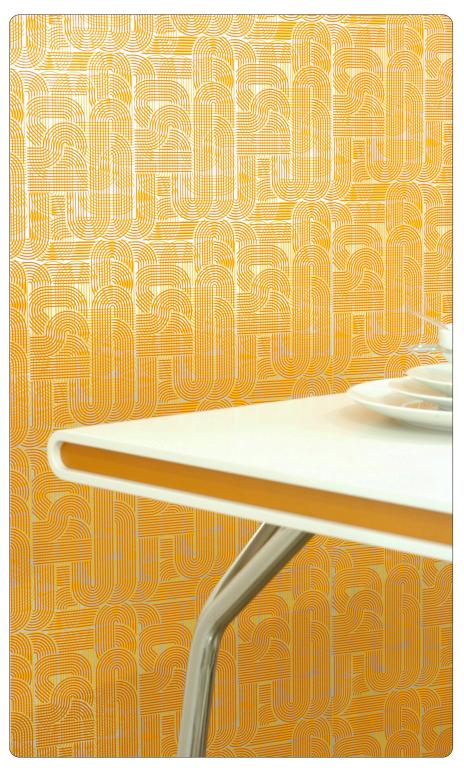

Circuit is symmetry in motion. The layers of interlocking labyrinths create serious depth and movement for a two color print. In order to avoid chaos, we find that sticking to complementary ink colors in this pattern is best. You can create a bright color pop (as in Tangerine) or a soft wash of elegance (see Sugar). This is a design that attracts a second look and invites you to linger a while.

### SPECS

ROLL SIZE

PATTERN REPEAT

SIDE TO SIDE MATCH

MADE TO ORDER IN USA


27" W x 180" L 8.81" / 22.38cm EIGHTH (1/8) DROP






# CIRCUIT

by Ted

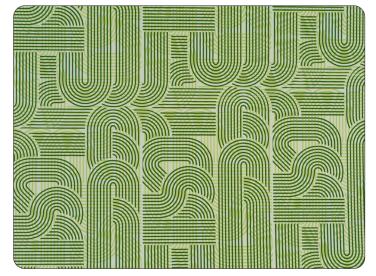

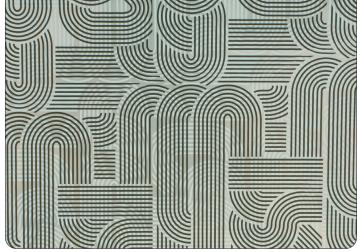

#### BASIL

PRINTING METHOD: HANDSCREEN
 GROUND: TYPE I CLAY COATED IVORY

BACKING: NONWOVEN FIBER
 WEIGHT: 0.78 oz/sqft

• FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)

• FLAME SPREAD/SMOKE DEVELOPED: 15/205

• ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)

• INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED

#### CHOCOLATE

PRINTING METHOD: HANDSCREEN
 GROUND: TYPE I SILVER MYLAR
 BACKING: NONWOVEN FIBER


• WEIGHT: 0.78 oz/sqft


• FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)

• FLAME SPREAD/SMOKE DEVELOPED: 15/205

• ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)

• INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED

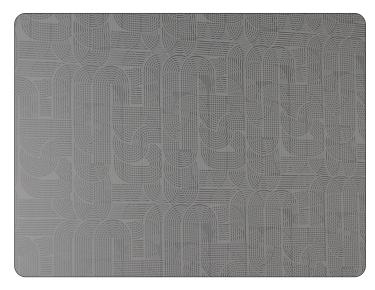

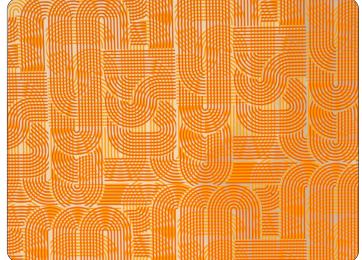

#### SUGAR

PRINTING METHOD: HANDSCREEN
 GROUND: TYPE I WHITE MYLAR
 BACKING: NONWOVEN FIBER
 WEIGHT: 0.78 oz/sqft

• FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)

• FLAME SPREAD/SMOKE DEVELOPED: 15/205

• ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)

• INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED

#### TANGERINE

• PRINTING METHOD: HANDSCREEN
• GROUND: TYPE I SILVER MYLAR
• BACKING: NONWOVEN FIBER

• WEIGHT: 0.78 oz/sqft

• FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
• FLAME SPREAD/SMOKE DEVELOPED: 15/205

• ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)

• INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED