


FLOWER OF LOVE

by Flavor Paper

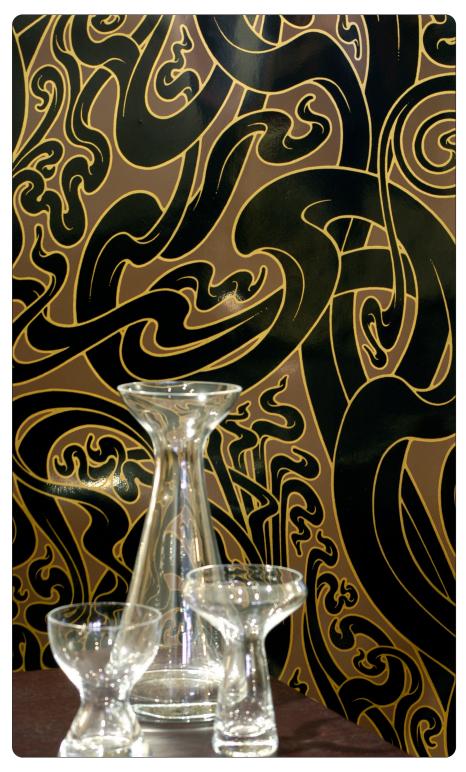

When Art Nouveau meets 1960's psychedelia, magic happens. Cue Flower of Love, a Ted original that's bursting with an undeniably sexy flow and great scale. Whether used in a bedroom to help dial up amorous vibes or in a formal dining room to soften those hard edges, this design is a dynamic addition to any space in need of some stimulation. Flower Of Love can be installed in either direction to achieve very different effects.

SPECS

ROLL SIZE

PATTERN REPEAT

SIDE TO SIDE MATCH

MADE TO ORDER IN USA

27" W x 180" L 53.88" / 136.86cm HALF DROP





FLOWER OF LOVE

by Flavor Paper





CONDUCTIVE BLUSH

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I CLAY COATED THUNDER GRAY
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED

COOKIES AND CREAM

- PRINTING METHOD: HANDSCREEN • GROUND: TYPE I SILVER MYLAR
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED





ESPRESSO

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I BLACK MYLAR
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED

MODERN ROBIN

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I WHITE VINYL
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft • FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED



RASPBERRY SORBET

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I CHROME MYLAR
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED