



FLAVOR PAPER

sales@flavorpaper.com | flavorpaper.com

WARHOL BROOKLYN BRIDGE

by Andy Warhol® x Flavor Paper



In homage to the iconic work Warhol created in 1983 for the Brooklyn Centennial Commission to celebrate the Brooklyn Bridge's 100th anniversary, this multi-color screenprint demonstrates his signature color-block technique as well as multi-layer runs of the subject to create a three-dimensional aesthetic. Like the man himself, Flavor Paper used a photo based printing process where an image of the bridge was exposed in a darkroom to the screen itself. And to bring it to life, our artists layered classic (and complementary) Warhol colors and utilized some flavorful materials to capture the opposing viewpoints by dividing the picture plane into a top and bottom half, creating two landscape compositions in one dynamic piece.

©/®/TM The Andy Warhol Foundation for the Visual Arts, Inc.

SPECS

ROLL SIZE ————— 27" W x 180" L

PATTERN REPEAT ————— 27" / 68.58cm

SIDE TO SIDE MATCH ——— HALF (1/2) DROP

MADE TO ORDER IN USA

LEARN MORE!





FLAVOR PAPER

sales@flavorpaper.com | flavorpaper.com


WARHOL BROOKLYN BRIDGE

by Andy Warhol® x Flavor Paper



BLACK + WHITE

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I CLAY COATED MICA
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED

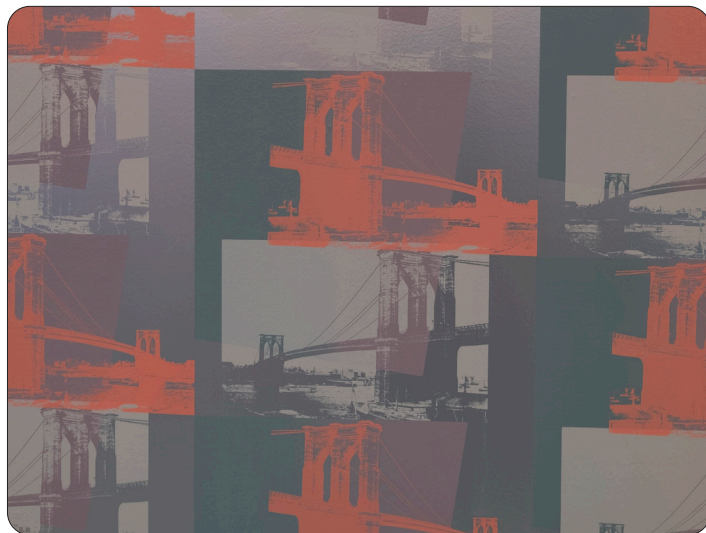

CROWN HEIGHTS

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I SILVER MYLAR
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED



FUHGEDABOUDIT

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I BRIGHT GOLD MYLAR
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED



PIET PRIMARY

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I BLACK MYLAR
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED