



FLAVOR PAPER

sales@flavorpaper.com | flavorpaper.com

WYTHE TOILE

by Dan Funderburgh



Created by Dan Funderburgh for the Wythe Hotel, this nouveau toile is a delicate tribute to the perfectly imperfect sights and scenes of Williamsburg, Brooklyn. Specifically North 11th and Wythe where the hotel is located. From their tremendous room and bar views you can pick out many of these images – not to mention the entire Manhattan skyline. Dan also designed two other beautiful papers that pay tribute to the cooperage and rope factory history of the building. We highly recommend planting yourself there when visiting NYC to get some real Flavor.

SPECS

ROLL SIZE ————— 27" W x 180" L
PATTERN REPEAT ————— 46.69" / 118.59cm
SIDE TO SIDE MATCH ——— STRAIGHT ACROSS
MADE OT ORDER IN USA

LEARN MORE!






FLAVOR PAPER

sales@flavorpaper.com | flavorpaper.com

WYTHE TOILE

by Dan Funderburgh

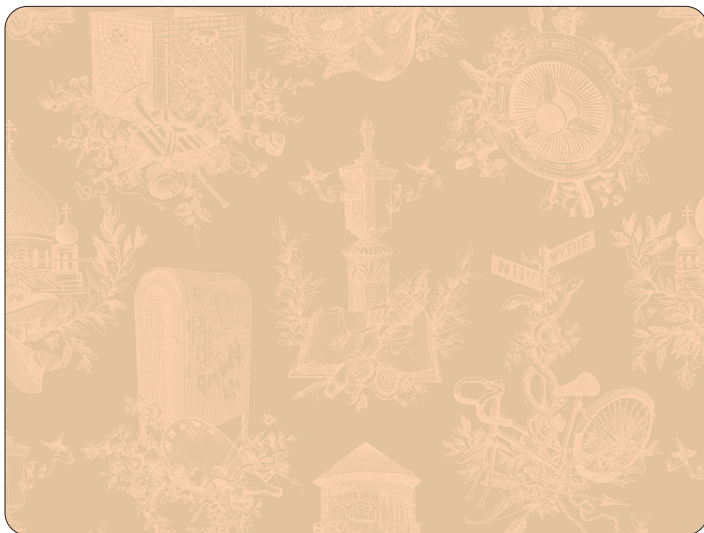

CREAMPUFF

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I CLAY COATED OATMEAL
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED



FINBOURN FLAT

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I VINYL STONE
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED



MIDNIGHT GREEN

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I CLAY COATED GRAY
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED



SAND

- PRINTING METHOD: HANDSCREEN
- GROUND: TYPE I CLAY COATED IVORY
- BACKING: NONWOVEN FIBER
- WEIGHT: 0.78 oz/sqft
- FIRE RATING: CLASS A, AS PER ASTM E 84 (ADHERED)
- FLAME SPREAD/SMOKE DEVELOPED: 15/205
- ECO: PRINTED WITH WATER BASED INKS (LATEX OR ECO-SOLVENT)
- INSTALLATION: COMES UNTRIMMED | PRO INSTALL RECOMMENDED